

Pat-Add AF 70

Defoamer - Solventborne & Solventfree system



PATCHAM

Pat-Add AF 70 a polysiloxane and organic polymer defoamer and air release agent for solvent-borne and solvent-free systems during production and application

Features of Pat-Add AF 70

- Low risk of gloss reduction, haze, craters and cissing
- Strong defoaming and air releasing




Reference

Pat-Add AF 70

6-7 mm thickness



7-8 mm thickness

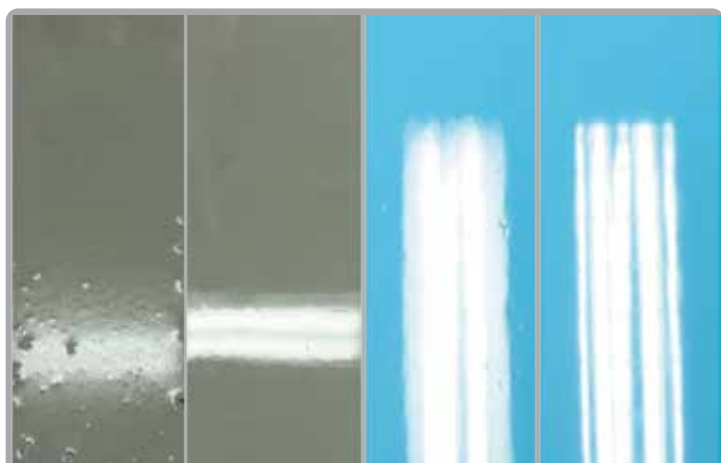

Reference

Pat-Add AF 70

Reference

Pat-Add AF 70

- **Protective and Maintenance Coating**
Epoxy Intermediate, Acrylic Polyol, Polyester polyol, polyaspartic Solvent free polyether polyol, thermoplastic Acrylate
 - **Solvent Free Floor Coating**
Solvent free Epoxy & PU system
 - **Solvent Free Colorants**
Epoxy Colorant
Castor oil base colorant for Floor Coating
 - **Dosage: 0.5-1 % on total formulation**
- Can be used in the grinding stage as well as post addition stage**